

50 kW | 170 600 Btu

EE300

Tank-Kondensatpumpe



200 l/h
52,8 gal/h



4 m
13,1 ft



30 db(A) DIN EN 3745
~ < 24 db(A) DIN EN 3744

Beschreibung

- Geräuscharme Pumpe mit 1,5 Meter langem Netzkabel
- Integriertes Rückschlagventil
- Kompakte Bauweise
- Überlauf-Sicherheitsschalter


Besonderheiten

- Kostengünstig
- Robust

Anwendung

Die Tankpumpe EE300 ist für die Förderung von Kondensat aus Klimaanlage, Kühltheken, Luftentfeuchtern und Gas-Brennwertkesseln konzipiert. Das Gehäuse besteht aus schlagfestem ABS und ist chemisch beständig gegen das säurehaltige Kondensat aus Brennwertheizungen.

Performance

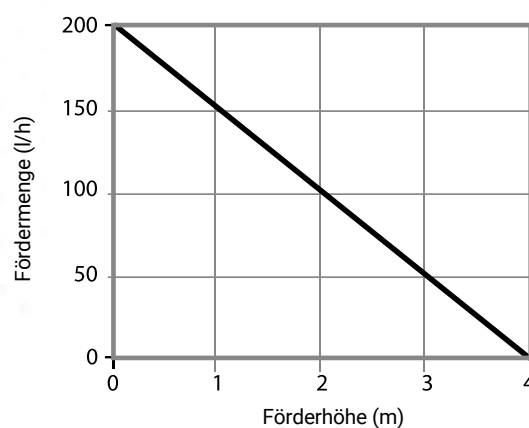



Technische Daten

Für Kühlleistung bis zu [kW]	50
Antrieb	Zentrifugalpumpe
Netzspannung & Frequenz	230V, 50/60Hz
Leistungsaufnahme [W]	Betrieb: 65 Standby: 0
Max. Fördermenge [l/h]	200
Max. Förderhöhe [m]	4
Tankkapazität [l]	1
Abmessungen L x B x H [mm]	200 x 105 x 160
Alarmschaltung	max. 230V, 3A (ohmsche Last) NO normal offen NC normal geschlossen
Druckschlauch [mm]	8 x 2

Schaltung des Alarmkontakts:

- ○ Weißes Kabel = COM
- Rotes Kabel = NC normal geschlossen
- Schwarzes Kabel = NO normalerweise offen



Lieferumfang

- Pumpe mit 1,5 Meter langem Netzkabel

50 kW | 170 600 Btu

EE300

Tank Pump



200 l/h
52,8 gal/h



4 m
13,1 ft



30 db(A) DIN EN 3745
~ < **24 db(A) DIN EN 3744**

Description

- Low-noise centrifugal pump with 1.5-metre-long mains cable
- integrated non-return valve prevents the backflow of condensate into the container
- Compact construction


Special features

- inexpensive
- robust

Usage

The 300 tank pump is designed for the transport of condensate from air conditioning systems, refrigeration counters, dehumidifiers and gas condensing boilers. The housing is made from impact-stable ABS and is chemically resistant to the acidic condensate from condensing boiler systems.

Performance

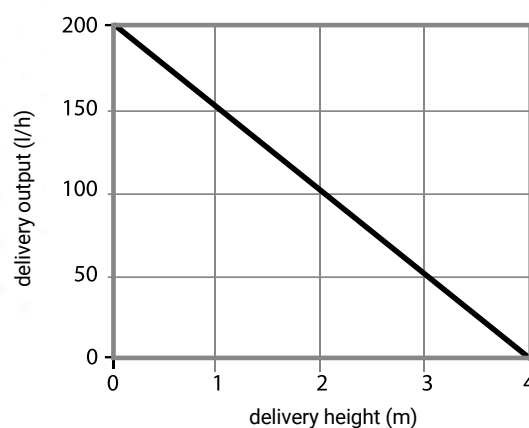




Technical data

For air conditioners up to [kW]	50
Drive	Centrifugal pump
Mains voltage & frequency	230V, 50/60Hz
Power consumption [W]	Operation: 65 Standby: 0
Max. flow rate [l/h]	200
Max. delivery height [m]	4
Tank capacity [l]	1
Pump unit L x W x H [mm]	200 x 105 x 160
Alarm switch	max. 230V, 3A (ohmic load) NO normally open NC normally closed
Pressure hose [mm]	8 x 2

Connection of the alarm contact:

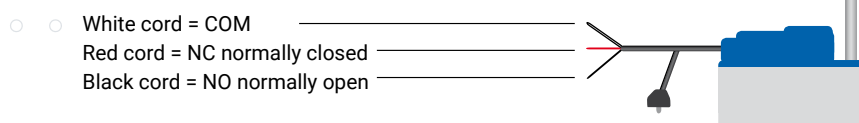

Inside the box

- pump unit