



SOLENOID PUMP

ESX04

TECHNICAL
DATA

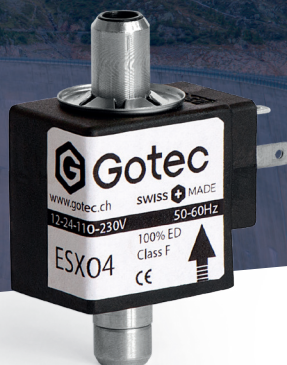

DIMENSIONS

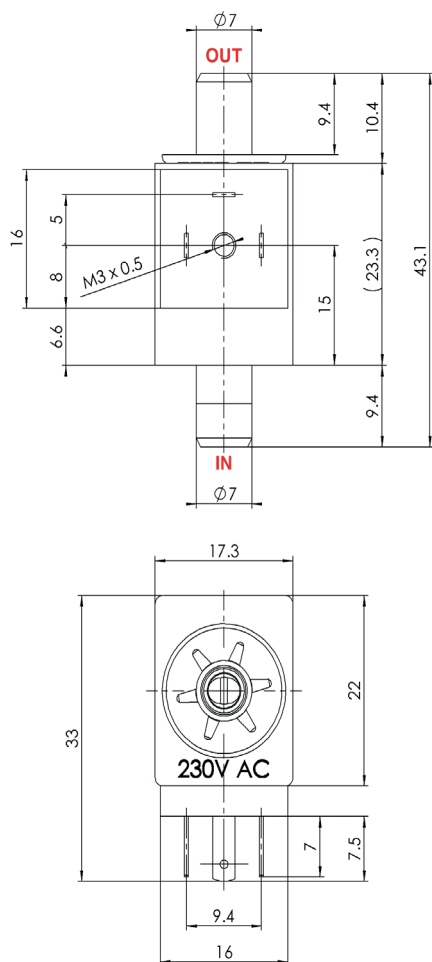

NOMINAL RATED DATA

Pressure (no flow)	≥ 0.3[bar]
Open flow	≥ 5[l/h]
Viscosity range	1...600[mm ² /s]
Filter	Mesh 100
Voltage	230[V] (12, 24, 110V)
Frequency	50, 60[Hz]
Electrical connection	3 x 2.8 x 0.5 [mm]
Power	5[W]
Weight	~35[g]
Temperature	1...50[°C]
Insulation	Class F Class 1
	100% ED / 20 [°C]


SOLENOID PUMP

ESX04 230V


TECHNICAL DATA



PERFORMANCES

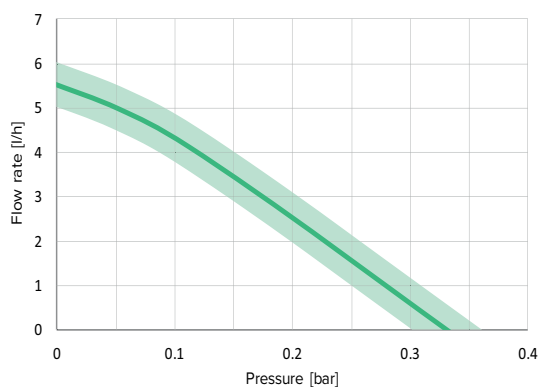

OPEN FLOW & TEMPERATURE

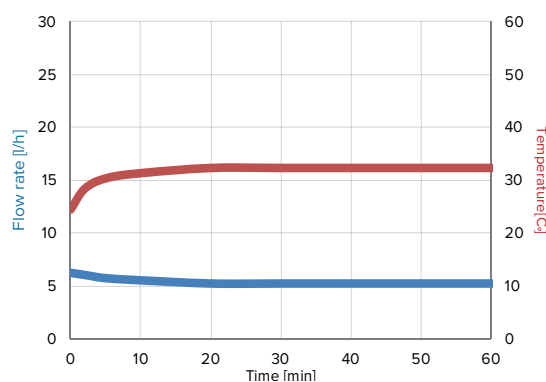


Tested with 20°C of water at ambient temperature

ACCESSORIES



Large choice of materials & options

ELECTRIC WIRING DIAGRAM

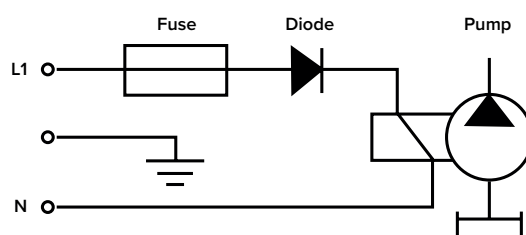

Please refer to instruction manual for more installation details. For more information, visit our website : www.gotec.ch


Certifications




SOLENOID PUMP

ESX04 24VAC


TECHNICAL DATA



PERFORMANCES

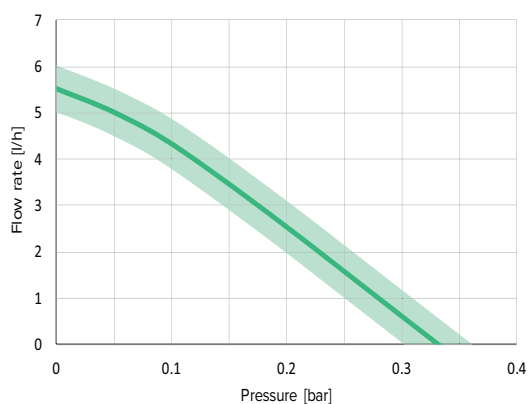

OPEN FLOW & TEMPERATURE

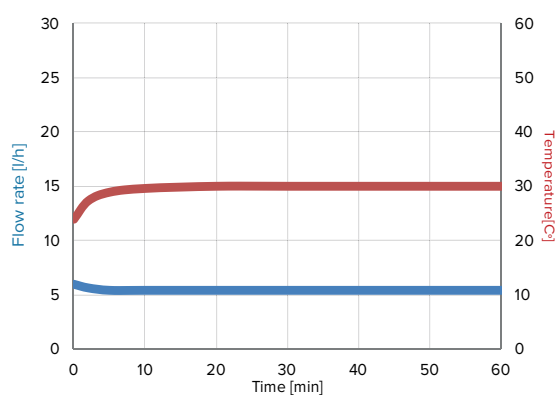


Tested with 20°C of water at ambient temperature

ACCESSORIES



Large choice of materials & options

ELECTRIC WIRING DIAGRAM

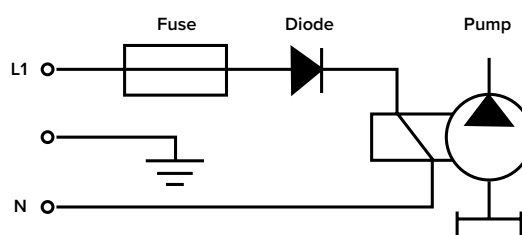

Please refer to instruction manual for more installation details. For more information, visit our website : www.gotec.ch

Certifications

