



SOLENOID PUMP

ETG200

TECHNICAL DATA



DIMENSIONS

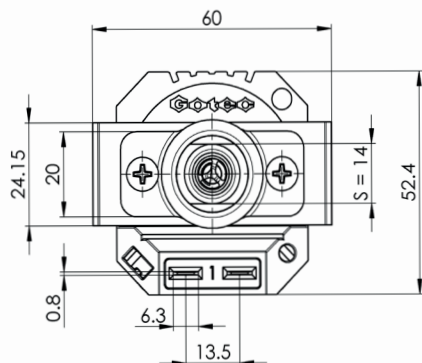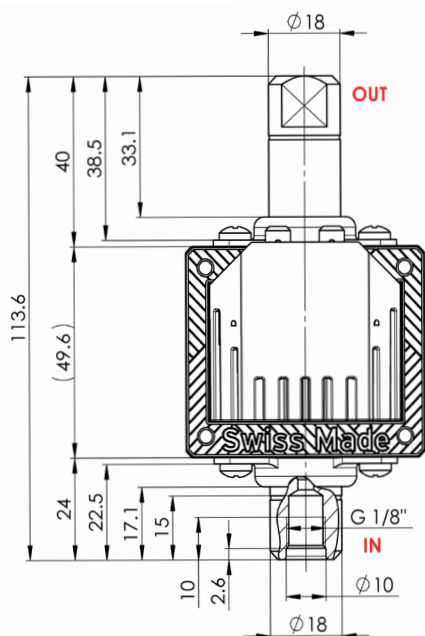

NOMINAL RATED DATA

Pressure (no flow)	≥ 20[bar]
Open flow	≥ 20[l/h]
Viscosity range	1...600[mm2/s]
Filter	Mesh 100
Voltages	230[V] (24, 110V)
Frequencies	50, 60[Hz]
Electrical connection	2 x 6.3 x 0.8 [mm]
Power	25[W]
Weight	~560[g]
Temperature	1...50[°C]
Insulation	Class H Class 2
	100% ED / 20 [°C]


SOLENOID PUMP

ETG200 230V

TECHNICAL DATA




PERFORMANCES

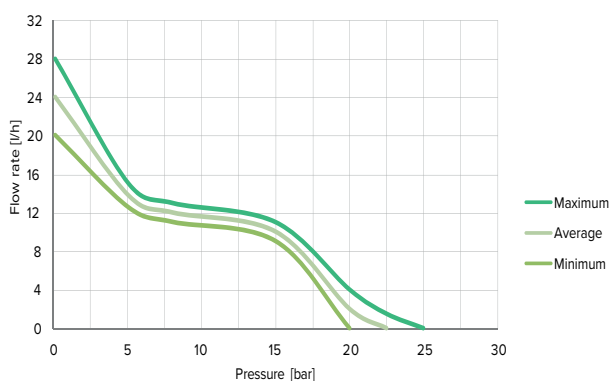


Tested with 20°C of water at ambient temperature

OPEN FLOW & TEMPERATURE

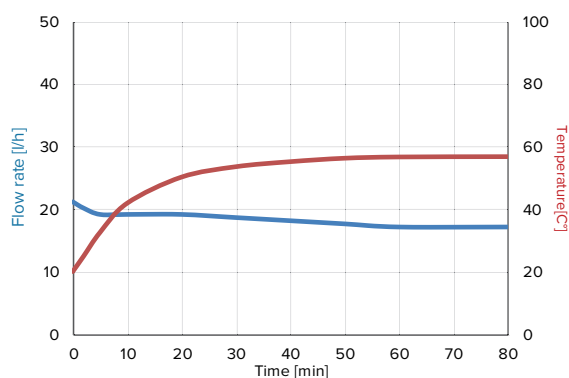


ACCESSORIES

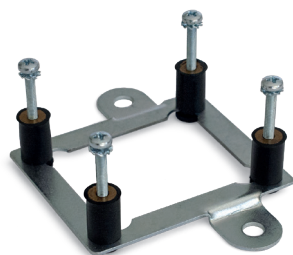

Mounting plate

Large choice of materials & options

ELECTRIC WIRING DIAGRAM

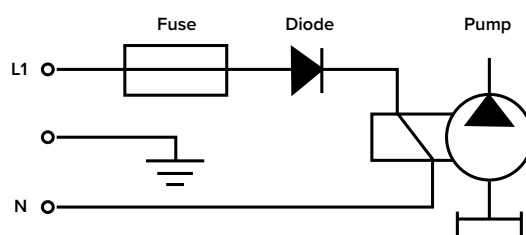

Please refer to instruction manual for more installation details. For more information, visit our website : www.gotec.ch

Certifications




SOLENOID PUMP

ETG200 24VAC




TECHNICAL DATA

PERFORMANCES

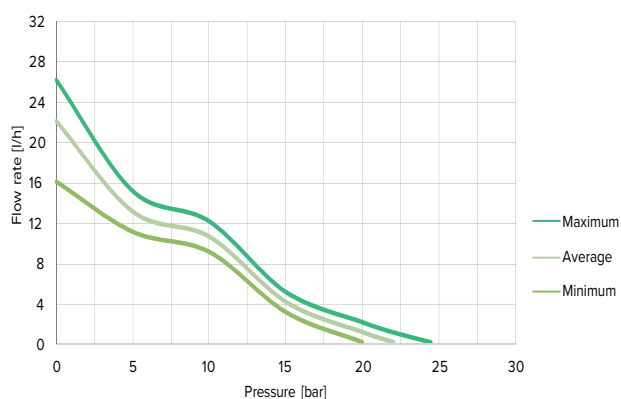


OPEN FLOW & TEMPERATURE

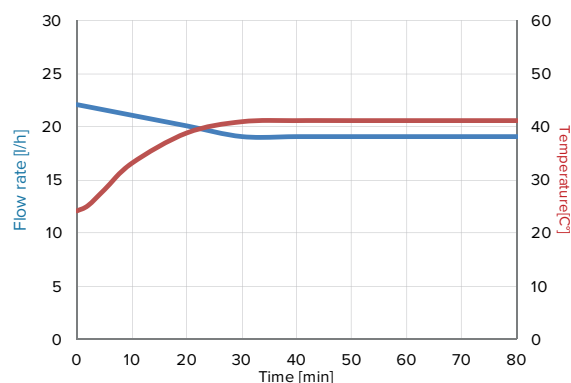

Tested with 20°C of water at ambient temperature


ACCESSORIES

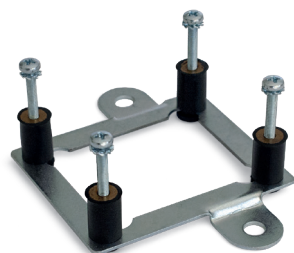

Mounting plate

Large choice of materials & options

ELECTRIC WIRING DIAGRAM

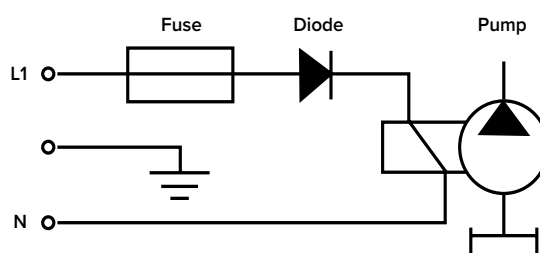

Please refer to instruction manual for more installation details. For more information, visit our website : www.gotec.ch

Certifications

