

10 kW | 34 000 Btu

EE1200RAPIDO

Mini-Kondensatpumpe mit Kanal



10 l/h
2,6 gal/h



10 m
32,8 ft



27 db(A) DIN EN 3745
~ < 20 db(A) DIN EN 3744

Beschreibung

Der **EE1200RAPIDO** wird in einem Set mit Kabelkanal, Winkelstück, einer Deckenverkleidung, sowie weiteres Installationszubehör in der Farbe "Verkehrsweiß" geliefert.


Anwendung

Die **EE1200RAPIDO** ist mit einer hochwertigen Schweizer Elektromagnetpumpe ausgestattet, die eigens zur Förderung von Kondensat entwickelte wurde. Die Pumpe verfügt über große Öffnungsquerschnitte und ist darüber hinaus sehr leise. Dies verhilft dem System zu überdurchschnittlicher Langlebigkeit, auch bei starker Beanspruchung.

Besonderheiten

- Ausreichend Platz für Kältemittel- und Versorgungsleitungen
- Ansprechendes Design
- Einfache Wartung
- Geräuscharm
- UL-geprüft

Performance

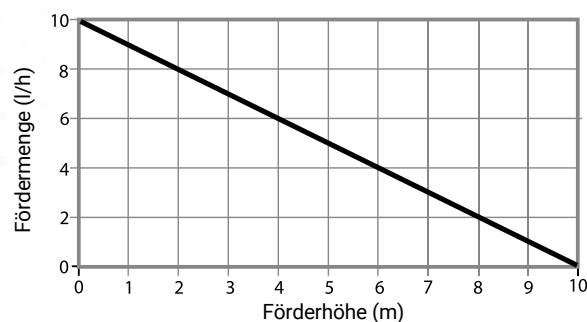



Lieferumfang

- Pumpe und 3-stufiger Schwimmerschalter mit Schmutzfänger
- Zweiteiliges Winkelstück
- Kabelkanal (800 x 80 x 60 mm)
- Silikonschlauch (ID 15 x 40 mm) - zum Anschluss an das Klimagerät
- PVC-Entlüftungsschlauch
- gerader Schlauchverbinder
- 4x Kabelbinder
- 4x Schrauben und Dübel für die Befestigung von Kanal und Winkelstück
- 90°-Krümmerrohr
- 2 x Montageklemme
- Schlauchverbinder
- 2x doppelseitiges Klebeband aus Moosgummi



Technische Daten

Für Kühlleistung bis zu [kW]	10
Antrieb	Elektromagnetpumpe
Netzspannung & Frequenz	230V, 50/60Hz
Leistungsaufnahme [W]	Betrieb: 8 Standby: 1
Max. Fördermenge [l/h]	10
Max. Förderhöhe [m]	10
Schaltpunkte Schwimmerschalter [mm]	Alarm: max. 23 Start: 18 ±1 Stop: 14 ±1
Alarmschaltung	max. 230V, 8A (ohmsche Last) NO normal offen NC normal geschlossen
Druck-, Saugschlauch [mm]	6 x 1,5



Installationsvideo:





10 kW | 34 000 Btu

EE1200RAPIDO

Mini-Condensate pump with duct



10 l/h
2,6 gal/h



10 m
32,8 ft



27 db(A) DIN EN 3745
~ < 20 db(A) DIN EN 3744

Description

The **EE1200RAPIDO** comes in a set with a duct, an elbow, a ceiling seal and installation accessories in actual RAL 9016 colour "traffic white".


Usage

The **EE1200RAPIDO** has been specifically designed for direct installation into the Eckerle-duct-system. The **EE1200RAPIDO** is fitted with a high quality Swiss made piston pump. They offer wide opening duck-bill-valves (non-sensitive against water borne contaminants) and they run remarkably quiet.

Special features

- Space for refrigerant pipes
- Easy bending of pipes
- Simplified maintenance
- Extremely silent pumps
- Aesthetic
- UL approved

Performance

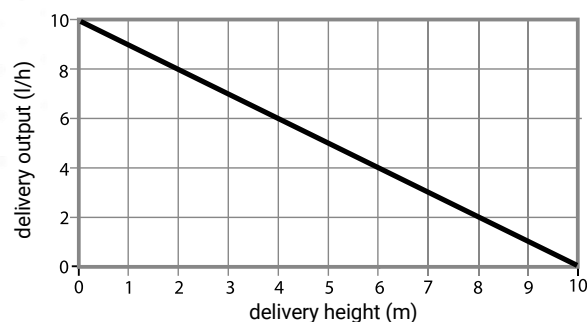



Inside the box



- pump block
- three-stage float switch with dirt retainer
- duct (800 x 80 x 60 mm)
- two part elbow (back plate + cover)
- ceiling duct cover
- silicon hose (internal diameter 15 mm - connects to split drain hose)
- PVC vent hose
- 4x screws and plugs for fixing duct and elbow
- straight hose connector
- 4x cable ties
- 90° elbow tube
- 2 x installation clamp for the duct
- Hose connector for duct
- 2x double sided padded tape



Technical data

For air conditioners up to [kW]	10
Drive	Solenoid pump
Mains voltage & frequency	110V or 230V, 50/60Hz
Power consumption [W]	Operation: 8 Standby: 1
Max. flow rate [l/h]	10
Max. delivery height [m]	10
Switch points float switch [mm]	Alarm: max. 23 Start: 18 ±1 Stop: 14 ±1
Alarm switch	max. 230V, 8A (ohmic load) NO normally open NC normally closed
Pressure, suction hose [mm]	6 x 1,5



Installation video:

