

**NEW: Integrated membrane pump**

12 kW | 40 000 Btu

## PUMPKIN® 15

Entry-level Mini-Condensate Pump



12 l/h  
3,1 gal/h



10 m  
32,8 ft



23 db(A) DIN EN 3745  
~ < 16 db(A) DIN EN 3744

### Description

The PUMPKIN®15 consists of a pump unit and a 3-level float switch that controls the pump (switching it on and off). The transparent float unit is connected directly to the outlet pipe of the A/C unit drip tray or to the condensate outlet line. The supplied package includes the pump, the 3-level float switch and mounting accessories, i.e. double-sided padded tape for attaching the float switch and an anti-vibration pad.

### Usage

The PUMPKIN®15 is the ideal choice for use in split wall air conditioning systems. With its extremely slim design and low noise level, it is a perfect fit for air conditioners with limited space.

### Special features


- extremely quiet
- affordable
- ultra slim design
- reliable

### Installation options

in the ceiling **1**

in trunking  
beside the unit **2**

**3** in the A/C unit

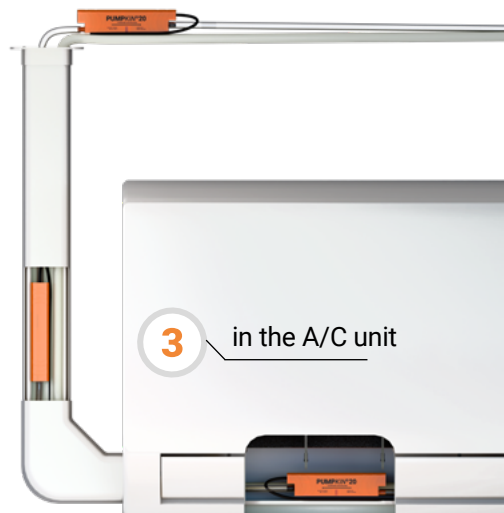



## Inside the box

- Pump block
- 3-stage float switch with dirt retainer
- 1x mounting bracket
- PVC vent hose
- 2x double sided padded tape
- Silicon hose (internal diameter 15 mm, length 40mm - connects to split drain hose)
- Mounting kit (2x screws and 2x plugs)



## Technical data

For air conditioners up to [kW]	12
Drive	Membrane pump
Mains voltage & frequency	100-240V, 50/60Hz
Power consumption [W]	Operation: 4   Standby: 1,5
Max. flow rate [l/h]	12
Max. delivery height [m]	10
Max. suction height [m]	1,5
Pump unit L x W x H [mm]	166 x 30,6 x 39
Float switch L x W x H [mm]	82 x 39 x 39
Switch points float switch [mm]	Alarm: max. 23 Start: 18 ±1 Stop: 14 ±1
Alarm switch	100-240V, 5A (ohmic load) NO normally open NC normally closed
Pressure, suction hose [mm]	6 x 1,5



## Installation video:



SCAN ME